


# BARIX

THE VOICE OF SIMPLICITY

---

## EXSTREAMER STORE&PLAY

IP Audio decoder with USB and microSD storage interfaces

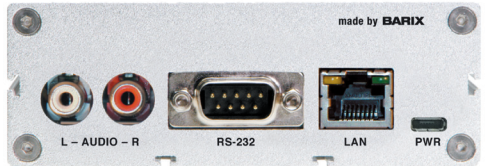

---

The Exstreamer Store&Play automatically downloads audio tracks and playlists via IP networks and schedules the playback of the received audio files. Supported by an application specific firmware, this product is designed to be used for In-Store background music and ad

insertion, as well as for other use cases that require the playback of scheduled items without relying on a live Internet radio stream. The Exstreamer Store&Play can also be used for decoding live HTTP/RTP audio streams whenever the network connectivity allows it.

---

### Applications

- Background music in Retail and Hospitality environments
- Localized and dynamic Ad insertion
- Company branded music

### Features

- MP3 Decoding
  - Stereo Line Level Output
  - Playback of live audio streams (HTTP or RTP)
  - Serial interface
  - USB 2.0 Interface
  - Internal microSD storage capability
  - Embedded Real Time Clock
  - Low Power consumption
-

---

# Technical Specifications

## Electrical

- Power Supply 5VDC, 2 Watt max.
- Standard 'Micro-B' USB connector

## Ethernet

- 10/100Mbps Auto-negotiation, Auto MDI-X
- RJ-45 connector with integrated Link/Activity LED
- Protocols: TCP/IP, FTP, HTTP, DHCP
- Web User Interface for remote control, status and configuration

## Analog Output

- Line level output, 40..60 Ohm impedance on RCA and 1/8" headphone jack
- Output level software controllable
- Full scale output voltage: 5.6 dBu, 4 Vpp into 600 Ohm load
- Frequency response (-3dB) 20Hz ... 20kHz \*
- Signal to Noise Ratio -92 dB \*
- Total harmonic distortion (THD) <0.01% \*
- Dynamic range 92dB \*
- Stereo crosstalk -91dB @ 1kHz \*

## Audio formats

- MP3 CBR/VBR, up to 320 kbps, 8..48 kHz sample freq.

## RS-232 Interface

- Male 9-pin Sub-D connector
- 115'200 Baud asynchronous
- 5 VDC supply output for external device (100 mA max.)

## Miscellaneous

- Green and red LED for status display
- Button for reboot and reset factory defaults

## Mechanical

- Aluminum case, 250g
- Rack and wall mountable using accessories

## Dimensions (W x H x D)

- W x H x D: 108x38x78.7mm (4.25x1.5x3.1 inch)

## Declarations of conformity

RoHS, FCC, CE, C-Tick

**MTBF** (Calculated acc. MIL217F at 25°C environment ground fix)

- Exstreamer Store&Play : min. 500 000h

\* using MP3 @48kHz sample rate, 320 kbps

---

# Environmental

## Operating Environment

0 to +40°C / 32 to 104°F

0 - 70% relative humidity, non-condensing

## Storage Conditions

0 to +70°C / 32 to 158°F

0 - 70% relative humidity, non-condensing

---

# Certifications/compliant with

RoHS, FCC, CE, C-Tick

## Immunity

according to EN 55024, EN 61000-6-2

## Emissions

according to EN 55022, EN 61000-3-2, -3-3

## Product Safety

according to EN 60590

---

# Ordering Information

## Package

2014.9158 Exstreamer Store&Play 8GB EU package  
2014.9159 Exstreamer Store&Play 8GB US package  
2014.9160 Exstreamer Store&Play 8GB UK package  
2014.9161 Exstreamer Store&Play 8GB NoPSU package

## Accessories

2006.9072 Wall Mounting Bracket  
2007.9082 Barix 19" Rack mount  
2006.9054 Cable Set Audio

## Device

2014.8081 Exstreamer Store&Play 8GB

---

For commercial related questions (distributors contacts, price list, business opportunities) please contact

**sales@barix.com**

---

For technical inquiries (problem reports, request for documentation, etc.) please contact

**support@barix.com**

---

**Barix AG** – Seefeldstrasse 303 – CH-8008 Zurich – info@barix.com – www.barix.com  
Phone: +41 43 43322 11 – Fax: +41 44 2742849

© Barix AG 2014, all rights reserved. All information is subject to change without notice.  
All mentioned trademarks belong to their respective owners and are used for reference only. Product sheet V1.0

