



BARIX

Barionet 400 Syn-Apps

I/O device to implement into Syn-Apps Revolution Notification System.

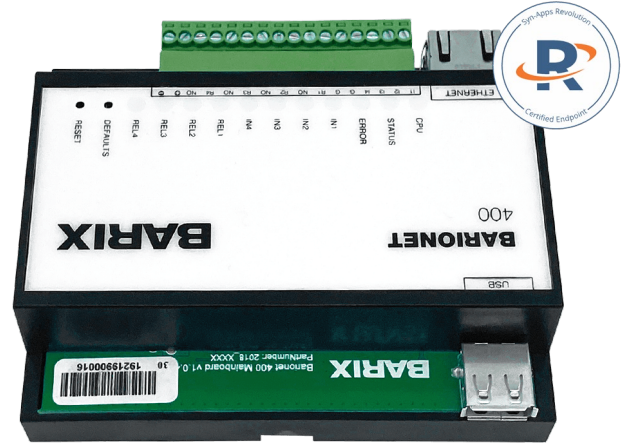

Barionet 400 Syn-Apps is a PoE powered I/O device server which is certified for the Syn-Apps' Revolution mass notification system. The device features four digital inputs and four relays. Extension of the functionality via the USB port and via a programming interface is possible as an option. The Barionet 400 devices provides a robust bridge between Syn-Apps' Notification System and physical interfaces such as distress buttons, fire alarm panels, motion sensors, light switches, door activators and more.

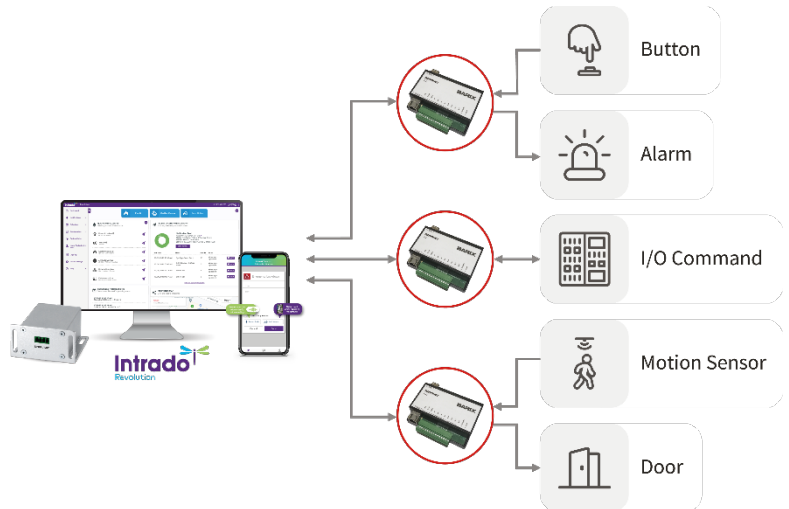

Applications

Integration into Syn-Apps for:

- Control of emergency alerts with time-sensitive information
- Automated actions when an event is triggered, such as closing of doors, power of lights, screens, horns, transport options or shutting down of building infrastructure
- Access control
- Machine control

Features

- Configurable on Singlewire InformaCast Server
- One 10/100 Ethernet port
- 4 Relay Outputs
- 4 Digital Inputs
- USB Host Interface
- Embedded Linux / Lede / OpenWRT
- IPv4 / IPv6 stack
- Barionet DIN-Rail Case
- Supply Voltage 9-30 VDC
- IEEE 802.3af PoE

Technical Specifications

Operation System

- Linux / OpenWRT

Network / WiFi Interfaces

- 1 x Ethernet (RJ45) Interface
- IPv4, IPv6 capable
- 10/100 fdx/hdx, auto negotiation
- WiFi 802.11 b/g/n, 2.4 GHz
- TCP/IP, RTP, UDP, ICMP, DHCP, CGI, HTTP(S), SNMP

I/O Interface

- 4 x Relay Outputs (30VDC, 0.5A)
- 4 x Digital Inputs (dry contacts)

USB Interface

- 1 x USB Host (Type A) Interface

CPUs / Memory

- MediaTek MT7620N, Qino Lite Module
- 64MB SDRAM
- 8MB Flash

OEM Options

- RTC Real Time Clock

User Interface

- Web interface for control / configuration
- 10 x Multicolor LED Status indicators
- Reset & Factory Defaults Button

Power Requirements

- Single 9-30V DC supply voltage, 2.5 Watt (without attached USB devices) or
- IEEE 802.3af PoE

Measurement

- 4.05" x 3.35" x 1.22" / 103mm x 85mm x 31mm

Weight

- 160g

Warranty

- Two years

Environmental

Operating Environment

0 to +50°C / 32 to 122°F

0 - 70% relative humidity, non-condensing

Storage Conditions

-20 to +70°C / -4 to 158°F

0 - 70% relative humidity, non-condensing

Certifications

CE, RoHS, FCC

Ordering Information

2018.9257P BARIONET 400 (incl. Syn-Apps)



For commercial related questions (distributors contacts, price list, business opportunities) please contact: sales@barix.com



For technical inquiries (problem reports, request for documentation, etc.) please contact: support@barix.com

Barix AG

Limmatstrasse 21, 8005 Zürich, Switzerland

Phone: +41 434 33 22 11

www.barix.com



Direct Link