
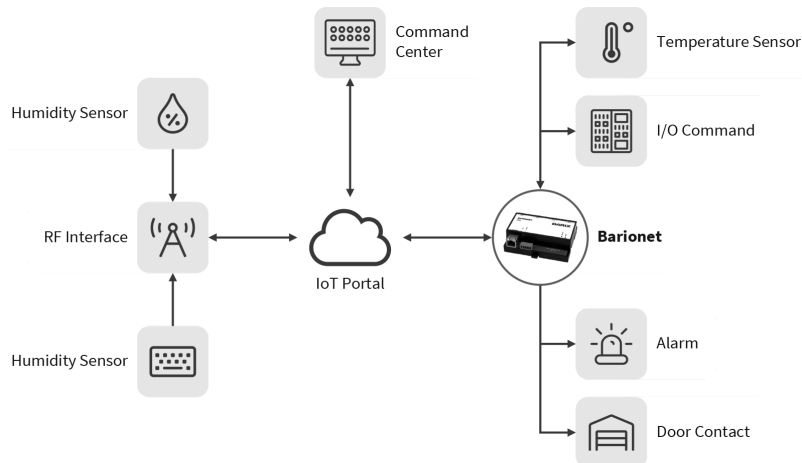
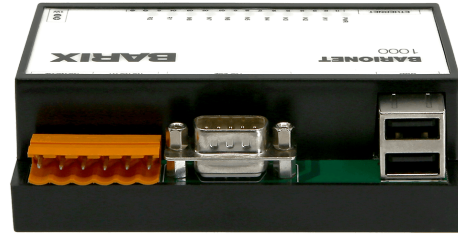


## Barionet 1000

Universal, programmable I/O Device Server.

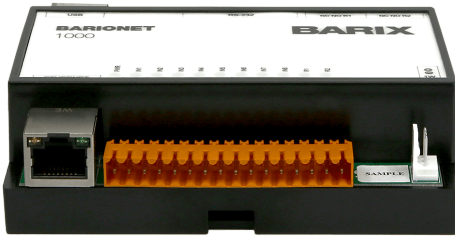

Barionet 1000 is a device server, based on Linux/Lede/OpenWRT. The device features a wide range of interfaces such as two USB, WiFi, RS322 serial port, analog and digital I/Os, Relays and Dallas 1-wire support. It is IPv4 or IPv6 capable. Supporting SNMP, Modbus and universal ASCII protocols, the Barionet device can be easily integrated into 3rd party management systems. Barix Products are developed in Switzerland and manufactured in the EU.

### Applications

- Automation engineering in buildings,
- public transport and network infra-structures
- Machine control
- Access control and security systems
- driving horns or lights
- Environmental monitoring at power stations, sluices, or in agriculture
- Contact closure monitoring
- Logging of temperature and humidity
- HVAC steering
- PV power management

### Features

- Embedded Linux / Lede / OpenWRT
- Programmable in C++, Lua or Python
- IPv4 / IPv6 stack
- One 10/100 Ethernet port
- Wi-Fi 802.11 b/g/n, 2.4Ghz
- 2 Relay outputs
- 4 Digital Outputs
- 4 Digital Inputs
- 4 Universal Inputs (analog or digital)
- RS232 Interface
- 2 USB Host Interfaces
- Interface for temperature sensor – Dallas
- 1-wire® 18DS20
- Barionet DIN-Rail Case
- Supply Voltage 9-30 VDC

# Technical Specifications

## Operation System

- Linux / OpenWRT

## Network / WiFi Interfaces

- 1 x Ethernet (RJ45) Interface
- IPv4, IPv6 capable
- 10/100 fdx/hdx, auto negotiation
- WiFi 802.11 b/g/n, 2.4 GHz
- TCP/IP, RTP, UDP, ICMP, DHCP, CGI, HTTP, SNMP

## I/O Interface

- 2 x Relay Outputs (30VDC, 5A)
- 4 x Digital Outputs (open-collector, 24VDC, .3A)
- 4 x Digital Inputs (0-15VDC) with conf. pullups
- 4 x Universal Inputs (Analog 0-15VDC 12bit or Digital 0-15VDC) with configurable pullups

## Serial Interface

- 1 x RS-232 (DSub-9 male) Interface
- 600-115'200 baud rate, 7-8 bit, O/E/N Parity

## UBS Interface

- 1 x USB Host (Type A) Interface

## Miscellaneous Interfaces

- Universal Dallas 1-Wire® Interface for external temperature sensors 18DS20 and other 1-Wire® equipment

## CPUs / Memory

- MediaTek MT7620N, Qino Lite Module
- 64MB SDRAM
- 16MB Flash

## User Interface

- Web interface for control / configuration
- 11 x LED Status indicators

## Power Requirements

- Single 9-30V DC supply voltage, 2.5 Watt

## Measurement

- 4.05" x 3.35" x 1.22" / 103mm x 85mm x 31mm

## Weight

- 180g

## Warranty

- Two years

# Environmental

## Operating Environment

0 to +50°C / 32 to 122°F

0 - 70% relative humidity, non-condensing

## Storage Conditions

-20 to +70°C / -4 to 158°F

0 - 70% relative humidity, non-condensing

## Certifications

CE, RoHS, FCC

## Ordering Information

2016.9187P Barionet 1000 NoPSU Package



For commercial related questions (distributors contacts, price list, business opportunities) please contact: [sales@barix.com](mailto:sales@barix.com)

For technical inquiries (problem reports, request for documentation, etc.) please contact: [support@barix.com](mailto:support@barix.com)

**Barix AG**

Limm  
atstra  
sse  
21,  
8005

Zürich

,  
Switz  
erland  
Phone  
: +41  
434

33 22  
11  
www.barix.com



Direct Link

© Barix AG 2021, all rights reserved. All information is subject to change without notice.  
All mentioned trademarks belong to their respective owners and are used for reference only. Product Sheet V0.3